

SLIME MACHINE


Set-Up & Safety Instructions



1 800 637-3656

www.twisterdisplay.com

Parts List

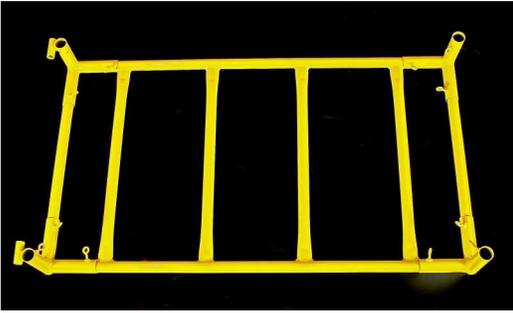

Base Unit: Quantity-1



Corner Fitting:

Quantity-3




**Tires (with 5/8 bolts
and lock nuts):
Quantity-2**



24" Pipe: Quantity-1



44.5" Tapered Pipe: Quantity-4

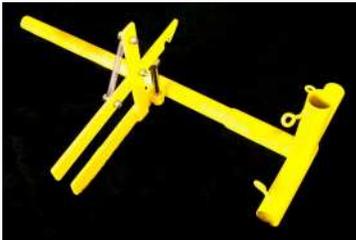

Trigger Unit:

Quantity-1



41.5" Pipe: Quantity-6



Bucket Assembly:


Quantity-1



Target Cross Brace: Quantity-1



Collar: Quantity-1

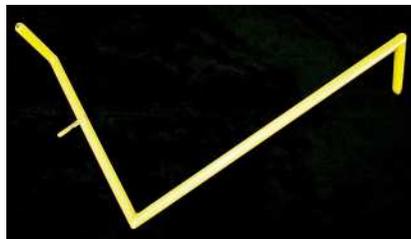

Target Arm: Quantity-1



Filler Tube Hook:

Quantity-1



Filler Tube:
Quantity-1



Clips:
Quantity-4



Guar Gum:
Quantity-8
(8 ounce bags)



Target: Quantity-1



Vinyl Canvas:
Quantity-1



Sponge Balls:
Quantity-12



Green/Yellow Food Dye:
Quantity-8
(16 ounce bottles)



Drum Pump: Quantity-1



Drum: Quantity-1

Assembly Instructions



Attach tires to the base unit, with the 5/8" bolt and lock nut. (The nut goes on the inside side of the tire.)



Insert a 44.5" tapered pipe in each corner fitting of the base unit. (The tapered end goes up.)





Put the target arm cross brace onto two of the tapered pipes.

IMPORTANT NOTE: *The arm pivot goes on the inside and is on the opposite side from the wheels.*



Insert a 41.5" pipe onto each tapered pipe .





Step 5

Slide the bucket assembly onto the trigger unit. Make sure that it is positioned so that the roller engages with the trigger hook.



Step 6

Slide on the collar and tighten.



Step 7

Slide on a corner fitting and tighten.



Step 8

Insert the remaining 41.5" pipes into the corner fitting and tighten.



Step 9

Place the remaining two corner fittings onto either end of the 24" pipe. Be sure to slide them completely on, but do not tighten. Attached these corner fittings to the opposite ends of the 41.5" pipes. (Leaving the corner fittings loose will help to guide them onto the pipes.) Tighten all fittings.



Step 10

Tip the unit onto its side. Block the tires and find items to elevate the unit about a foot or so. Place the top on the unit, and tighten.



Step 11

Insert filler tube hook and tighten.



Step 12

Attach filler tube.

Use the clips to route the filler tube along the frame to where ever you are going to place the drum.



Step 13

Attach the canvas to the frame with the Velcro straps.



Insert the pump into the bung on the drum. The connect the filler tube to the pump.



The drum can be attached to the base using the ratchet strap.



Slime Mixture - Texture & Color

(With Guar Gum for authentic "Slime" feel)



8 ounce of guar gum



6-8 caps full of green food dye

Create a fine mist with a garden hose sprayer.

VERY SLOWLY sprinkle about half of the guar gum into the mist.



Once the drum is half filled (and the guar gum half used), stop and stir thoroughly. NOTE: A cordless drill with a mixing attachment works perfectly for this.



Continue spraying the water and sprinkle the remainder of the guar gum into the mist.



Add 6-8 caps full of green food dye and mix. NOTE: The food dye is undiluted and will stain.



Slime Mixture - Color Only

(Water and dye only)



**6-8 caps full
of green food dye**

Fill the drum with water, then add 6-8 caps full of green food dye and mix. NOTE: The food dye is undiluted and will stain.

NOTE: A cordless drill with a mixing attachment works perfectly for this.



Safety Instructions

- ◆ **Never use baseballs or hard balls. (Use only the balls provided.)**
- ◆ **Set up on level ground.**
- ◆ **Keep Slime Machine staked and/or sand-bagged for stability.**
- ◆ **Keep Slime Machine away from electricity.**
- ◆ **Never stand under the bucket when in use.**
- ◆ **Do not allow anyone to climb on or lean against the Slime Machine.**
- ◆ **Do not allow anyone to hit the target with their hand.**
- ◆ **Take down the Slime Machine if there is high wind or chance of lightning.**

1 800 637-3656

www.twisterdisplay.com